



DSC(R)系列脱硫泵型谱图 Selection Chart of Series DSC(R) FGD Pump

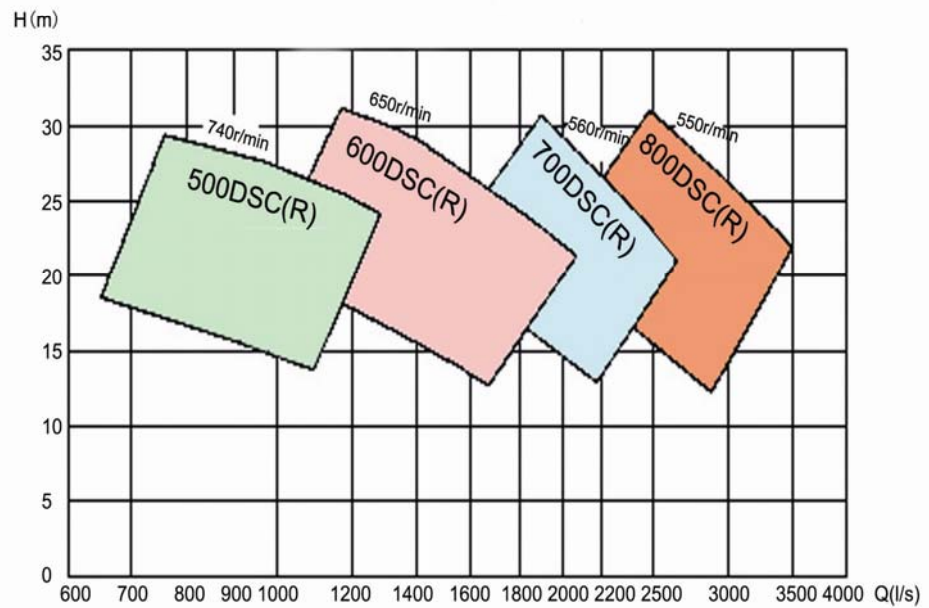

DSC(R)系列脱硫泵性能参数 Performance Parameter of Series DSC(R) FGD Pump

型号 Type	流量 Capacity(Q)		扬程 Head(H)	转速 Speed(n)	效率 Eff.(η)	必须汽蚀余量 NPSHr	排出口直径/吸入口直径 Discharge Dia./ Suction Dia.
	m ³ /h	l/s	m	r/min.	%	m	(mm/mm)
500DSC(R)	3900	1083	26	740	85	5	500/500
600DSC(R)	6300	1750	26	650	88	4.1	600/700
700DSC(R)	7600	2111	27	560	87	4.3	700/800
800DSC(R)	9800	2722	27	550	90	5.2	800/900

DSC(R)系列脱硫泵外形和安装尺寸图 Outline and Installation Dimension of Series DSC(R) FGD Pump

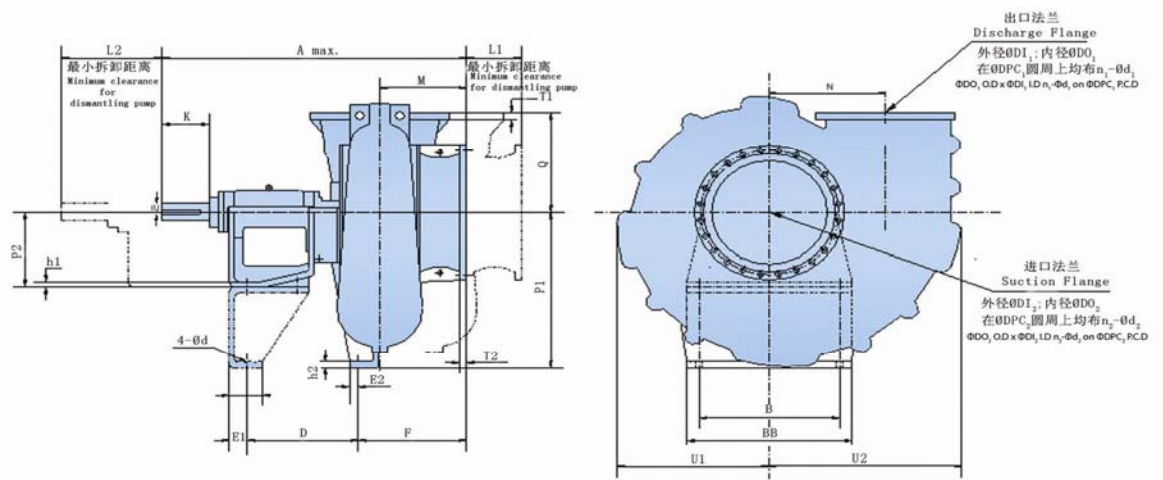

型号 Type	安装尺寸 Installation Dimension								轴 Shaft		安装尺寸 Installation Dimension					重量 Weight (KG)
	A	BB	B	D	E1	E2	F*	h1	h2	J	K	M*	L1	L2	d	
500DSC (R)	1773	1000/960	850	652	110	551	595	35	40	120	210	421	150	400	f42/f40	4000
600DSC (R)	1855	960	850	670	110	50	667	35	40	120	284	525	330	610	f39	4580
700DSC (R)	2315	1300	1100	895	130	75	768	40	45	150	355	583	375	720	f51	7280
800DSC (R)	2460	1300	1100	885	135	75	933	40	45	150	355	712	550	800	f51	8300

型号 Type	安装尺寸 Installation Dimension							进口法兰 Suction Flange					出口法兰 Discharge Flange					
	N	P1	P2	Q*	T1*	T2*	U1	U2	DO ₂	DI ₂	n ₂	d ₂	DPC ₂	DO ₁	DI ₁	n ₁	d ₁	DPC ₁
500DSC (R)	580	950	500	665	60	44	735	946	715	500	20	33	650	715	500	18	33	650
600DSC (R)	700	1050	500	775	48	40	901	1155	910	600	24	30	840	840	600	18	36	770
700DSC (R)	780	1290	700	930	68	60	1080	1350	1025	768	24	40	950	1025	700	22	40	950
800DSC (R)	930	1400	700	985	62	62	1141	1493	1125	900	28	40	1050	1125	800	26	40	1050

*处尺寸包括橡胶密封垫的尺寸。 *The dimension includes the dimension of rubber seal.